




E85-R C LED E1/ST

Emergency for surface mounting based on LED. Housing in aluminium and zinc coated steel sheet. Two options for reflectors. C reflector for corridors and WB (wide beam) reflector. Available in White. Other colours on request.

E1 / ST betyder, at dette produkt har indbygget nødlis med 1 times lysetid i batteridrift. Det tester sig selv i henhold til europæiske nødlisstandards. Indikator LED'er på produktet viser testresultaterne.

Vare nr.	E85001200
EAN Nr.	4741145127530
Leveringstid	A

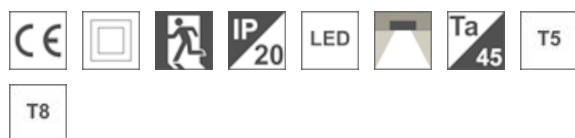

Tekniske specifikationer

Teknisk data	
Mindste omgivelsestemperatur (°C)	0
Maksimal omgivelsestemperatur (Ta=°C)	45
IP klasse	20

Lystekniske data	
Lyskilde	LED
Lumen ud (lm)	133
Lumen/Watt (lm/W)	27
MacAdams trin	3

Driver	
LED drivertype	NM
Antal drivere	1

Elektriske data	
Spænding fra (V)	220
Spænding til (V)	240
Frekvens (Hz)	50
Maksimal frekvens (Hz)	60
Total effektforbrug (W)	5
Lækstrøm (mA)	0,1

Nødlis	
Type nødlis	ST
Varighed i batterimodus (time)	1
Strømforbrug (W)	1,5
Lys i batterimodus (%)	100
Batteritype	NiMH
Batteriform	Stav
Batteri mAh	2000
Batterispænding	3,6
Batteri reservedelsnr.	SP-19596236

Optik	
Optik	C - Flugtvej
Materiale	Aluminium
Farve	Hvid

Dimensioner	
Diameter (mm)	80
Nettovægt (kg)	0,6992

Tilslutning	
Klemmetype	5×2×2.5mm ² Push In

Montering	
Produktmontering	Indbygning i loft, Påbygning i loft

Lagerdata	
Varens bruttovægt (kg)	0,76

Tekster

Ekstra information

Illustrationer

