

Product sheet

Basic Information

Order Number
Type
Common Number


2001151050
15/10 ZEL/ZLUTA
F61515



8595025342355

Measuring Unit
Packaging
Net Weight [kg]
Dimensions [mm]
Technical Support

KS
10 / - / - / 360
0,299
60 × 60 × 160
Petr Veselý, 581261172,
vesely@emos.cz




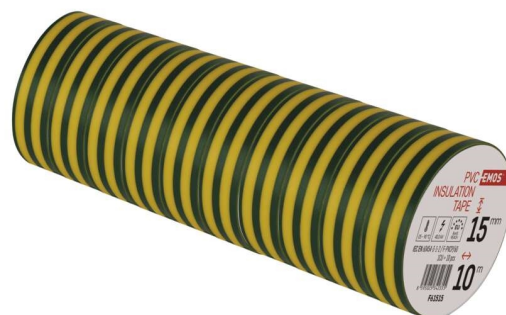


Basic Product Description

Professional electrical insulation tape from plasticised PVC for standard use in low-voltage wiring with wide range of temperatures.

Technical Description

tape type	PVC
width	15 mm
length	10 m
thickness	0.13 mm
colour	green/yellow
tensile strength	150 N/10 mm
electric strength - minimum	40 kV/mm
elongation	125 %
electric strength after moisture - minimum	35 kV/mm
flame tests	less than 1 second
adhesion to steel - minimum	1.8 N/10 mm
adhesion to the substrate	1.5 N/10 mm
recommended storage temperature	10–45 °C
installation temperature range	-25–90 °C



Product sheet

ROHS compliant	yes
REACH compliant	yes
complies with	CSN EN 60454-3-1-2/F-PVC/60
UV resistant	yes
water resistant	yes
adhesive material	rubber
intended use	cable insulation
dimensions	60 × 15 mm
packaging	10 pcs, foil
warranty period	2 years