


CEE 7/VII

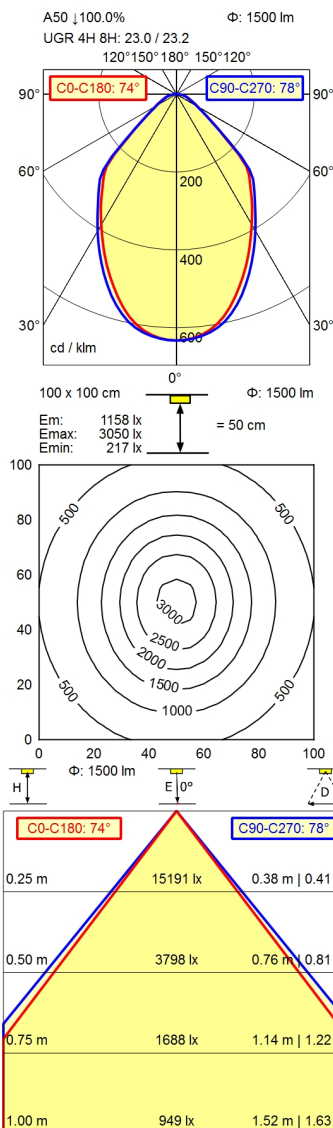

Light source

Work equipment

Connected load

Secondary tension

Power consumption

Sec. power consumption

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Arm

Balance of articulation joints

Mains lead

Fastening

Decorative contrast side parts

EAN

Weight without/incl. packaging

Packaging dimensions

LED

Electronic transformer

100 - 240 V; AC; 50 Hz; 60 Hz

24 V

ca. 23 W

ca. 20 W

approx. 1.500 lm

approx. 75 lm/W

adjustable white

approx. 3.000 K; 4.000 K; 5.000 K; 6.500 K

CRI $\geq$ 90; R9 $\geq$ 50

Direct; approx. 100 %

75°

< 3 SDCM

optical film; Prism aperture

$\leq$ 12.000 cd/m²

$\leq$ 25

IP 20; I with plug-in power supply; III without plug-in power supply
Touch DIM

Multi-function switch

Aluminium coloured anodised

Structured; Plastic

Aluminium coloured anodised

Spring

ca. 3,4 m; Mains plug; CEE 7/VII

Tap16; Table clamp (accessory); Screw-down flange

Black

4013330131524

ca. 2,3 kg; 4,2 kg

ca. 865 mm; 420 mm; 102 mm

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Arm-mounted luminaire TANEO
TND 1400/930-965/D
113735000-00810081

