

LED T5 Tube 175LM/W




Patent: ZL201430013288.7

100-240V 50/60Hz



With DALI/1-10V Driver



	4feet (1.2M) 1149 Dimension	5feet (1.5M) 1449 Dimension
L1	1162mm	1462mm
L2	1148mm	1448mm

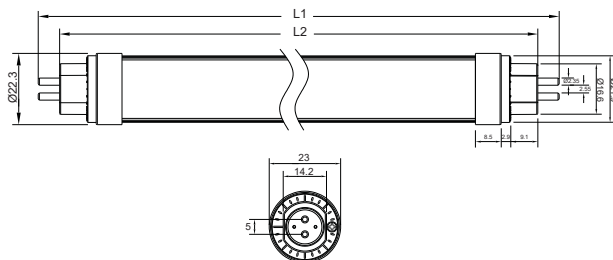


Rart No.	Size	Color Temp	Lumen(lm)	Power Consumption	CRI	Efficacy	Beam Angle	Operation Temperature	Weight/ Carton (25Pcs)
SL-DGA00-422NT-G5-P-F	1.2M	3000K	3850lm	22W	>80	175lm/W	130°	-20~40 °C (-4~104°F)	8.70kg
SL-DGA00-424LT-G5-P-F	1.2M	4000K	4200lm	24W	>80	175lm/W	130°	-20~40 °C (-4~104°F)	8.70kg
SL-DGA00-424WT-G5-P-F	1.2M	6500K	4200lm	24W	>80	175lm/W	130°	-20~40 °C (-4~104°F)	8.70kg
SL-DGA00-525NT-G5-P-F	1.5M	3000K	4375lm	25W	>80	175lm/W	130°	-20~40 °C (-4~104°F)	11.10kg
SL-DGA00-525LT-G5-P-F	1.5M	4000K	4375lm	25W	>80	175lm/W	130°	-20~40 °C (-4~104°F)	11.10kg
SL-DGA00-525WT-G5-P-F	1.5M	6500K	4375lm	25W	>80	175lm/W	130°	-20~40 °C (-4~104°F)	11.10kg

Lifetime 50,000hrs ERP level: Level B

Lamp Wiring Diagram

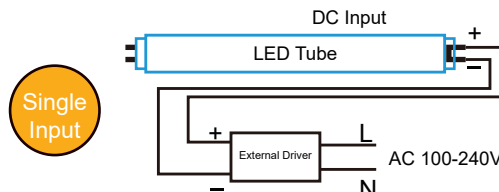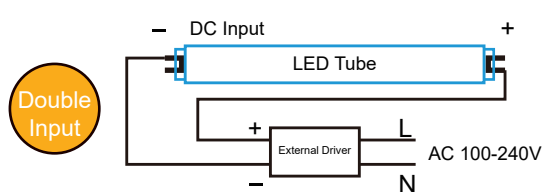

Structure diagram

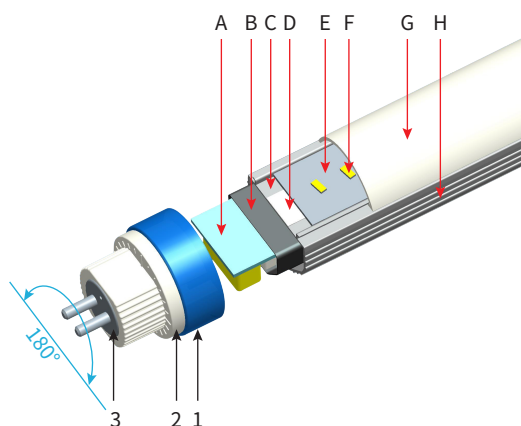

- A. Replaceable Driver
- B. Driver Case
- C. ALuminum Layer
- D. Silicone thermal
- E. LED PCB
- F. SMD Led
- G. V0-Fireproof Milky PC Cover
- H. Aluminum Housing

- 1. Metal Ring
- 2. Screw Hole
- 3. Scale of Rotation

SJOC Retail ApS
SL-DGA00-525LT-G5-P-F

A

B

C

D

E

F

G

B

25
kWh/1000h

2019/2015