


LED T5 Tube 175LM/W



Patent: ZL201430013288.7

100-240V 50/60Hz




	4feet (1.2M) 1149 Dimension	5feet (1.5M) 1449 Dimension
L1	1162mm	1462mm
L2	1148mm	1448mm

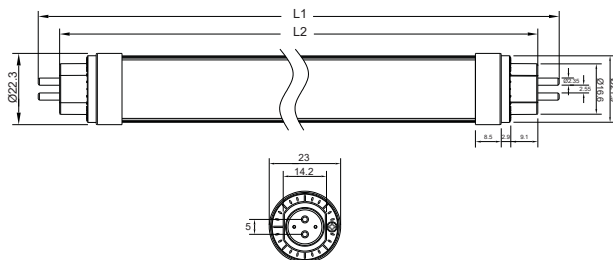


Rart No.	Size	Color Temp	Lumen(lm)	Power Consumption	CRI	Efficacy	Beam Angle	Operation Temperature	Weight/Carton (25Pcs)
SL-DGA00-422NT-G5-P-F	1.2M	3000K	3850lm	22W	>80	175lm/W	130°	-20~40 °C (-4~104°F)	8.70kg
SL-DGA00-424LT-G5-P-F	1.2M	4000K	4200lm	24W	>80	175lm/W	130°	-20~40 °C (-4~104°F)	8.70kg
SL-DGA00-424WT-G5-P-F	1.2M	6500K	4200lm	24W	>80	175lm/W	130°	-20~40 °C (-4~104°F)	8.70kg
SL-DGA00-525NT-G5-P-F	1.5M	3000K	4375lm	25W	>80	175lm/W	130°	-20~40 °C (-4~104°F)	11.10kg
SL-DGA00-525LT-G5-P-F	1.5M	4000K	4375lm	25W	>80	175lm/W	130°	-20~40 °C (-4~104°F)	11.10kg
SL-DGA00-525WT-G5-P-F	1.5M	6500K	4375lm	25W	>80	175lm/W	130°	-20~40 °C (-4~104°F)	11.10kg

Lifetime 50,000hrs ERP level: Level B

Lamp Wiring Diagram

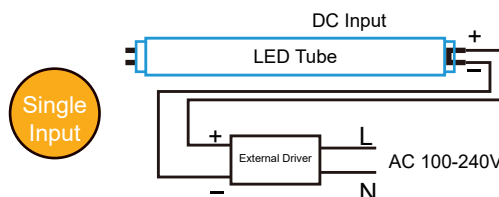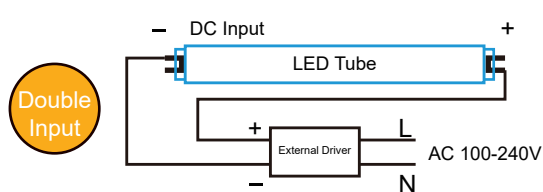

Structure diagram

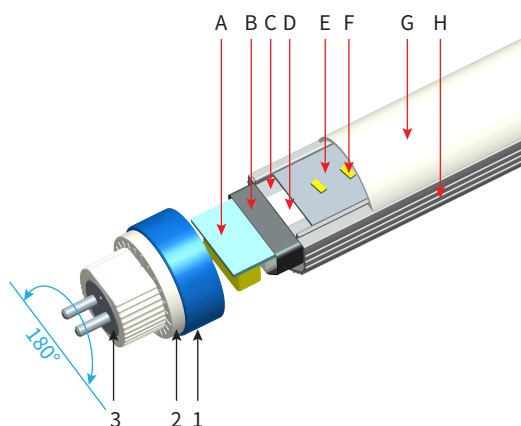

- A. Replaceable Driver
- B. Driver Case
- C. ALuminum Layer
- D. Silicone thermal
- E. LED PCB
- F. SMD Led
- G. V0-Fireproof Milky PC Cover
- H. Aluminum Housing

- 1. Metal Ring
- 2. Screw Hole
- 3. Scale of Rotation

