



MASTER VALUE LEDspot PAR



MAS LEDspot VLE D 9.5-75W 940 PAR30S 25D

With its robust design and warm-white beam of light, these new-generation PAR lamps are ideal for general lighting and spot lighting in the hospitality industry. It's a dimmable solution. They are especially suitable for public areas such as lobbies, corridors, stairwells, where the light is always on. The product offers more energy saving comparing with normal LED spots.

Product data


General Information	
Cap-Base	E27
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
Light Technical	
Color Code	940 [CCT of 4000K]
Beam Angle (Nom)	25 degree(s)
Luminous Flux	820 lm
Luminous Intensity (Nom)	3,000 cd
Luminous Efficacy (rated) (Nom)	86 lm/W
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Color Consistency	<6
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	820 lm

Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	9.5 W
Lamp Current (Nom)	60 mA
Wattage Equivalent	75 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	80 °C


MASTER VALUE LEDspot PAR

Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	PAR30S
Approval and Application	
Energy Efficiency Class	F
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	10 kWh
EPREL Registration Number	1121751
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Application Conditions	
can it be used in closed luminaires	No

Dimensional drawing




Photometric data



Light Distribution Diagram - MAS LEDspot VLE D 9.5-75W 940 PAR30S 25D

Product Data	
Order product name	MAS LEDspot VLE D 9.5-75W 940 PAR30S 25D
Full product name	MAS LEDspot VLE D 9.5-75W 940 PAR30S 25D
Full product code	871951444324200
Order code	929003485602
Material Nr. (12NC)	929003485602
Numerator - Quantity Per Pack	1
Net Weight (Piece)	0.160 kg
EAN/UPC - Product/Case	8719514443242
Numerator - Packs per outer box	6
EAN/UPC - Case	8719514443259


Product	D	C
MAS LEDspot VLE D 9.5-75W 940 PAR30S 25D	95 mm	86 mm



Accent Lighting Spots - MAS LEDspot VLE D 9.5-75W 940 PAR30S 25D


MASTER VALUE LEDspot PAR

Photometric data

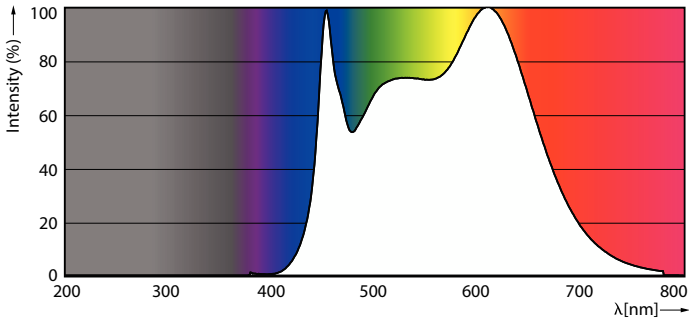


Spectral Power Distribution Colour - MAS LEDspot VLE D 9.5-75W 940 PAR30S 25D

Lifetime

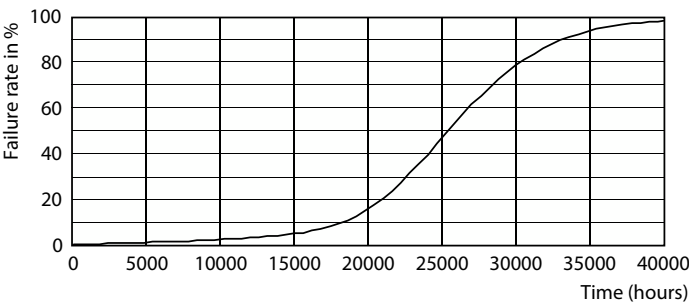

Life Expectancy Diagram

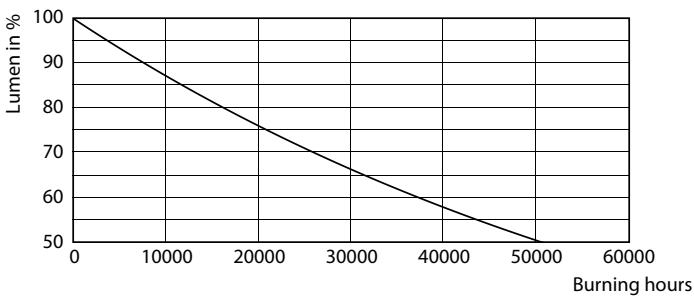

Lumen Maintenance Diagram - MAS LEDspot VLE D 9.5-75W 940 PAR30S 25D

