

Product sheet

Basic Information

Order Number
Type
Common Number


1450000520
P3120
P3120



8592920144367

Measuring Unit
Packaging
Net Weight [kg]
Dimensions [mm]
Technical Support

KS
1 / - / 10 / 40
0,1
40 × 55 × 148
Tomáš Pořízek, 581261141,
tomas.porizek@emos.cz

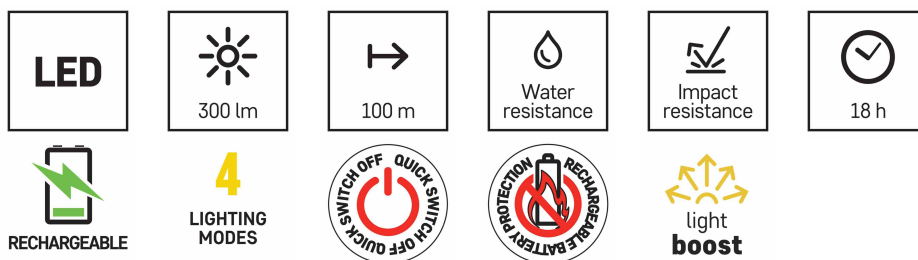

Technical Description

source of light
maximal light output
light output
maximal beam distance
beam distance
number of lighting modes
lighting modes
runtime
runtime detail
focus
impact resistance

LED
300 lm
LED BOOST – 300 lm, LED 100 % – 160 lm, LED 50 % – 100 lm, LED 10 % – 15 lm
100 m
LED BOOST – 100 m, LED 100 % – 80 m, LED 50 % – 60 m, LED 10 % – 30 m
4
LED BOOST, LED 100 %, LED 50 %, LED 10 %
3–18 hrs
LED BOOST – 1 min, LED 100 % – 3 hrs, LED 50 % – 3,5 hrs, LED 10 % – 18 hrs
yes
yes

LED rechar. metal flashlight 300 lm, 700 mAh

Product sheet

waterproof	yes (IP43)
rechargeable	yes
battery	Li-Ion 16340
battery type	700 mAh/3.7 V
batteries included	yes
recharge time	2,5 h
power connector type	USB-C
LED indication of the charging process	yes
LED indication of the accumulator state	yes
special features	quick switch ON/OFF, battery protection
features	clip, magnet, hand strap
material	aluminum
colour	black, metallic grey
dimensions	90 × 25 × 25 mm
weight	63 g
packaging	1 pc, box
warranty period	2 years